

# Fulflo® "M" Series Single Cartridge Vessels

- Carbon Steel
- 316 Stainless Steel

## Single Cartridge Filter Vessel Series

## High Pressure Single Cartridge Vessels

Parker's "M" Series Single Cartridge Filter Vessels are designed for a broad range of high pressure industrial and chemical process applications. All details of design, materials, construction and workmanship comply with the ASME code for pressure vessels. The "M" series is available with and without the ASME stamp.

### Applications

- Chemicals
- Process Water
- Catalyst Recovery
- Lubricants
- Solvents
- Coolants
- Cutting Oils
- Hydraulic Oils
- Other High Pressure Liquids
- Compressed Air and Gases



### Features and Benefits

- ASME design to insure integrity, available with and without the ASME stamp.
- T-Style head and shell for ease of installation and servicing.
- Standard O-ring closure seal is Buna-N, with optional materials available for improved chemical compatibility and higher temperature rating.
- Flanged or threaded connections to suit installation requirements and preference.
- Optional 150, 300 or 600 lb RFS0 flange connections for installation flexibility.
- 1 inch connections for maximum flow capability of filter cartridges.
- Utilizes one 10, 20 or 30 inch cartridge.
- Multiple bolt closure with bright zinc plated studs and nuts.
- Optional single-open-end (SOE 2-222 TC Style) cartridge adapter for positive sealing of high efficiency filter cartridges.
- Wide range of cartridge media available for process clarity control and chemical compatibility.
- Rigid cartridge support post with threaded end seal for positive double open end (DOE) cartridge sealing.

## Process Filtration Division



**WARNING! FAILURE OR IMPROPER SELECTION OR IMPROPER USE OF THE PRODUCTS AND/OR SYSTEMS DESCRIBED HEREIN OR RELATED ITEMS CAN CAUSE DEATH, PERSONAL INJURY AND PROPERTY DAMAGE.**

This document and other information from Parker Hannifin Corporation, its subsidiaries and authorized distributors provide product and/or system options for further investigation by users having technical expertise. It is important that you analyze all aspects of your application and review the information concerning the product or system in the current product catalog. Due to the variety of operating conditions and applications for these products or systems, the user, through its own analysis and testing, is solely responsible for making the final selection for the products and systems and assuring that all performance, safety and warning requirements of the application are met. The products described herein, including without limitation, product features, specifications, designs, availability and pricing, are subject to change by Parker Hannifin Corporation and its subsidiaries at any time without notice.

# Single Cartridge Filter Vessel Series

## Specifications

- Carbon steel or 316 stainless steel material
- Drain: 1/4 in NPT
- Vent: 1/4 in NPT
- Bolting: (4) 5/8-11 UNC bright zinc plated carbon steel

### Maximum Allowable Working Pressure

| Connections    | Designation | Carbon Steel at 250°(121°C) | 316 Stainless Steel at 250°(121°C) |
|----------------|-------------|-----------------------------|------------------------------------|
| FNPT           | T           | 1610 psig                   | 1610 psig                          |
| 150 lb. Flange | F           | 245 psig                    | 227 psig                           |
| 300 lb. Flange | H           | 665 psig                    | 590 psig                           |
| 600 lb. Flange | J           | 1332 psig                   | 1180 psig                          |

Note: FNPT maximum pressure is 1610 psig at 300°F with EPR O-ring, 400°F with Viton and FEP encapsulated Viton O-ring, and 500°F with FEP Encapsulated Silicone. Flanged units (F, H, and J designations) are based on ANSI B16.5 pressure at 250°F (121°C). The flanged versions can also be rated for the higher design temperature in which case the pressure rating will be reduced according to ANSI B16.5. Indicate the desired temperature in degrees F at the end of the model number. The gasket material and flange rating must be changed accordingly.

### "M" Series Flow Rates and Dimensions


| Model        | Typical Aqueous <sup>†</sup> Flow Rate (gpm) | Cartridge Length (in) | Height (in) <sup>++</sup> | Inlet Face to Outlet Face (in) |         | Weight (lbs) |         | Cartridge Removal Clearance (in) <sup>++</sup> |
|--------------|--|-----------------------|---------------------------|--------------------------------|---------|--------------|---------|--|
|              |  |                       |                           | FNPT                           | Flanged | FNPT         | Flanged |  |
| MC(N or U)1S | 6  | 10                    | 14.5                      | 4.62                           | 12.62   | 37           | 45      | 22   |
| MC(N or U)1D | 12   | 20                    | 24.5                      | 4.62                           | 12.62   | 46           | 54      | 42   |
| MC(N or U)1T | 18   | 30                    | 34.5                      | 4.62                           | 12.62   | 55           | 63      | 62   |

<sup>†</sup> Actual flow is dependent on fluid viscosity, micron rating, contaminant, media type and desired initial pressure drop.

<sup>++</sup> Add 3" when using TC internal option for use with TC style 2-222 O-ring cartridges.

## Ordering Information

|          |                                |                                     |               |   |              |  |  |                             |                                       |
|----------|--------------------------------|-------------------------------------|---------------|---|--------------|--|--|-----------------------------|---------------------------------------|
| <b>M</b> | <b>C</b>                       | <b>U</b>                            | <b>1</b>      | <b>S</b>  | <b>1</b>     | <b>F</b>   | <b>N</b>   | <b>TC</b>                   | <b>XXX</b>                            |
| Series   | Material                       | Design                              | Columns       | Length  | Inlet/Outlet | I/O Type   | Gasket Material  | Internal Option             | Special temperature for flanged units |
|          | C = Carbon Steel<br>S = 316 SS | N = Non-Code<br>U = ASME<br>U-Stamp | 1 = 1 Element | S = 10" Cart.<br>D = 20" Cart.<br>T = 30" Cart. | 1 = 1"       | T = FNPT<br>F = Flanged 150#<br>H = Flanged 300#<br>J = Flanged 600# | N = Buna-2-222 o-ring<br>E = EPR adapter<br>V = Viton*<br>T = FEP encapsulated Viton*<br>L = FEP encapsulated silicone | Blank = center post for DOE | Blank = 250°(121°C)                   |

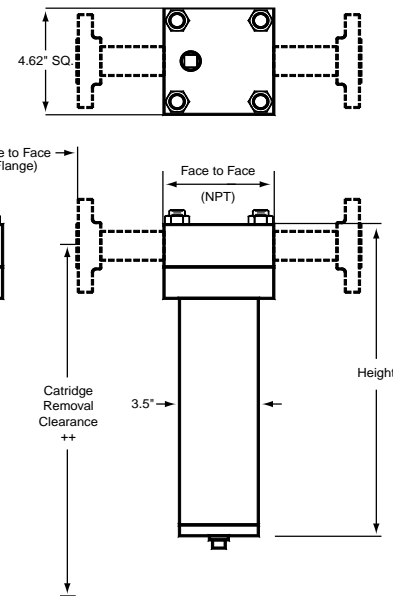

\* A trademark of E. I. du Pont de Nemours & Co.

## Process Filtration Division

Parker Hannifin Corporation  
Process Filtration Division  
P.O. Box 1300  
Lebanon, Indiana 46052  
Toll Free 1-888-C-FULFLO (238-5356)  
Telephone (765) 482-3900  
Fax (765) 482-8410  
<http://www.parker.com>

