

# Fulflo® Single Cartridge Filter Vessels

■ Carbon Steel

*Single Cartridge Filter Vessel Series*

## Fulflo® “B” Series Filters Are Suitable for a Wide Range of Industrial Applications

Carbon Steel “B” Vessels feature single center bolt for quick cartridge changing and in-line connections for easy installation.

Duplex vessels permit independent or parallel shell operation. In addition, they offer the advantage of continuous service because one can be serviced while the other is operating. Manifold vessels work simultaneously in parallel shells to provide higher flow rates with less pressure drop than single-shell models.

Air and gas single-shell vessels feature in-line pipe connections for easy installation and aluminum baffel sleeve deflectors for two-stage moisture removal.

### Applications

- Petrochemicals
- Solvents
- Coolants
- Potable Liquids
- Hydraulic Oils
- Compressed Air
- Process Water



### Features and Benefits

- Single center bolt for quick cartridge change.
- In-line pipe connection for easy installation.
- Optional integrally cast brackets for easy mounting.
- Drains and vents standard on all models.
- Standard Buna-N closure gasket material with optional Viton,\* Neoprene and fluoropolymer gaskets available.
- Spring-loaded bottom seats for positive cartridge sealing.
- Duplex vessels for continuous service.
- Manifold unit for increased flow.

## Process Filtration Division



**WARNING! FAILURE OR IMPROPER SELECTION OR IMPROPER USE OF THE PRODUCTS AND/OR SYSTEMS DESCRIBED HEREIN OR RELATED ITEMS CAN CAUSE DEATH, PERSONAL INJURY AND PROPERTY DAMAGE.**



This document and other technical information from Parker Hannifin Corporation, its subsidiaries and authorized distributors provide product and/or system options for further investigation by users having technical expertise. It is important that you analyze all aspects of your application and review the information concerning the product or system in the current product catalog. Due to the variety of operating conditions and applications for these products or systems, the user, through its own analysis and testing, is solely responsible for making the final selection for the products and systems and assuring that all performance, safety and warning requirements of the application are met. The products described herein, including without limitation, product features, specifications, designs, availability and pricing, are subject to change by Parker Hannifin Corporation and its subsidiaries at any time without notice.



# Single Cartridge Filter Vessel Series

## Bracketed Head Dimensions (in)

	NPT 1/4 (in)	NPT 3/4 (in)
A	4-7/32	4-7/32
B	2-3/4	3-5/16
C	1-1/2	2-3/16
D	1-1/2	1-7/8
E	1	1-3/8
F	1-1/4	1-21/32
G	4-3/16	4-5/16
H	2-1/8	2-1/8

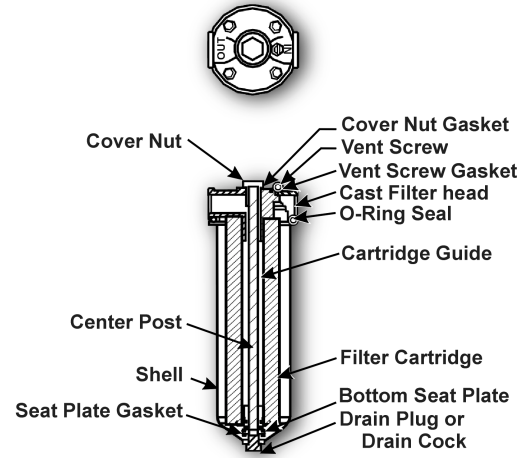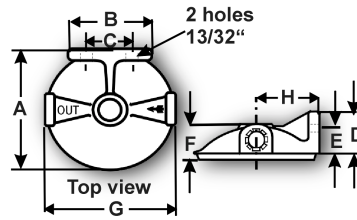

## Duplex (BDX1) and Manifold (BMCX2) Design Specifications

Model	Typical Aqueous Flow* (gpm)	(Number) & Length of Cartridges (in)	Pipe Size (NPT) (in)	Maximum Operating Pressure (psi@200°F)	Overall Height (in)	Shipping Weight (lbs)
BDX1-10-1/2 SD	5/10	(2) 10	1/2	150 psi (10.3 bar)***	13-3/4	16
BMCX2-10-1 SD**	10	(2) 10	1	150 psi (10.3 bar)***	13-5/8	14

- \* Actual flow rate is dependent on fluid viscosity, micron rating, contaminant and media type. Consult nomographs or flow curves for each application.
- \*\* Two shells in parallel. No bracket required.
- \*\*\* Maximum available working pressure is 100 psi (6.9 bar) at 250°F (121°C).

## Design Specifications

Model	Rated Capacity*	(Number) & Length of Wound Depth Cartridges (in)	Operating Pressure (psi@200°F)	Overall Height (in)	Outside Diameter (in)	Face-to-Face Dim. (in)	Pipe Size (NPT) (in)	Shipping Weight (lbs)
<b>Air and other gases</b>								
B3A-(1/4 or 3/8)SD	65 scfm	(1) 3	125 psi (8.6 bar)	7	3-5/8	4-3/16	1/4-3/8	3
B5A-(1/2 or 3/4)SD	110 scfm	(1) 5	125 psi (8.6 bar)	9-1/4	3-5/8	4-5/16	1/2-3/4	3-3/4
B7A-(3/4 or 1)SD	150 scfm	(1) 7	125 psi (8.6 bar)	11-3/8	3-5/8	4-1/2	3/4-1	5-1/4
AF7-3/4SD	180 scfm	(1) 7	150 psi (10.3 bar)†	11-3/8	3-5/8	4-5/16	3/4	4-1/4
<b>Liquids</b>								
B10-3/4 SD	5 gpm	(1) 10	150 psi (10.3 bar)††	12-7/8	3-5/8	4-5/16	3/4	6
B20-3/4 SD	10 gpm	(1) 20	150 psi (10.3 bar)††	23	3-5/8	4-5/16	3/4	9-1/4
B10-1 SD	5 gpm	(1) 10	150 psi (10.3 bar)††	13-1/4	3-5/8	4-1/2	1	6
B20-1 SD	10 gpm	(1) 20	150 psi (10.3 bar)††	23-1/4	3-5/8	4-1/2	1	9-1/4

- \* Maximum flow rate for gases based on air at 70°F (21°C) and maximum operating pressure with initial pressure loss of 3 psig (.2 bar) with a 5µm viscose wound depth filter cartridge.
- † Maximum allowable working pressure is 250 psi (17.2 bar) at 100°F (38°C).
- †† Maximum allowable working pressure is 100 psi (6.9 bar) at 250°F (121°C).

## Ordering Information

Design Series	Cartridge Length (in)	Connection Size (in)	Spring-Loaded Seal	Drain
B = Carbon	3	1/4		
Steel	5	3/8		
BDX1 = Duplex	7	1/2		
AF = Air	10	3/4		
	20	1		

## Process Filtration Division

Parker Hannifin Corporation  
 Process Filtration Division  
 P.O. Box 1300  
 Lebanon, Indiana 46052  
 Toll Free 1-888-C-FULFLO (238-5356)  
 Telephone (765) 482-3900  
 Fax (765) 482-8410  
<http://www.parker.com>



\* A trademark of E. I. du Pont de Nemours & Co.